



140MHz Standard Filter

Part Number 140040

Typical Performance

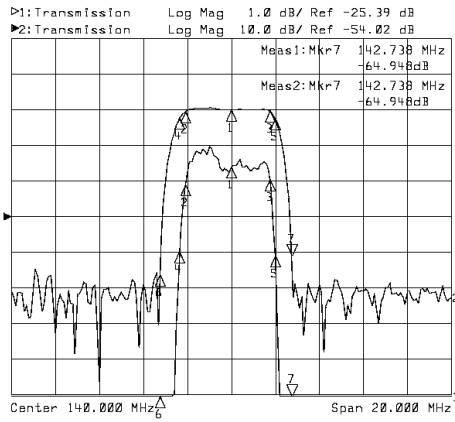

Horizontal: 2.0MHz/Div
Vertical: 1dB/Div&10dB/Div



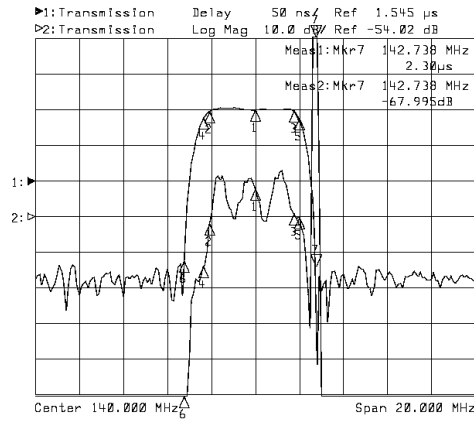


Horizontal: 2.0MHz/Div
Vertical: 50nsec/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	139.85	140.00	140.15
Insertion Loss at F0	dB		24.00	25.00
1 dB Bandwidth	MHz	3.70	3.83	
3 dB Bandwidth	MHz	4.20	4.33	
40dB Bandwidth	MHz		5.95	6.10
Passband Variation	dB		0.70	0.80
Group Delay Variation	nsec		50	70
Absolute Delay	usec		1.55	1.56
Ultimate Rejection	dB	48	50	
Substrate Material	-		LiTaO3	
Ambient Temperature	°C	-40	25	80

Package

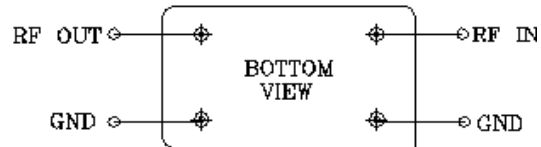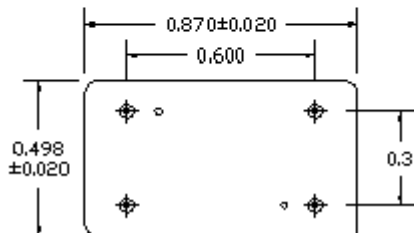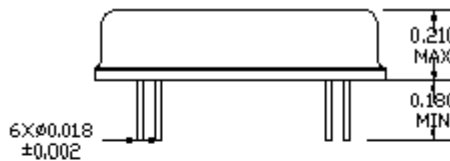

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XI