



140MHz Standard Filter

Part Number 140110

Typical Performance

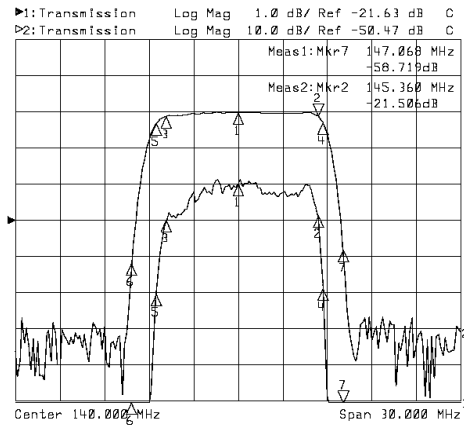

Horizontal: 3.0MHz/Div
Vertical: 1dB/Div&10dB/Div


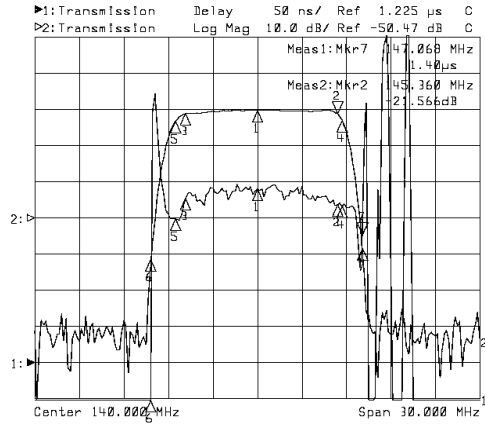


Horizontal: 3.0MHz/Div
Vertical: 50nsec/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	139.80	140.00	140.20
Insertion Loss at F0	dB		21.00	22.00
1 dB Bandwidth	MHz	10.00	10.18	
3 dB Bandwidth	MHz	11.00	11.24	
40dB Bandwidth	MHz		14.22	14.40
Passband Variation	dB		1.00	1.20
Group Delay Variation	nsec		40	50
Absolute Delay	usec		1.47	1.49
Ultimate Rejection	dB	50	58	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

Package

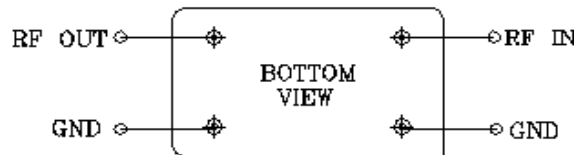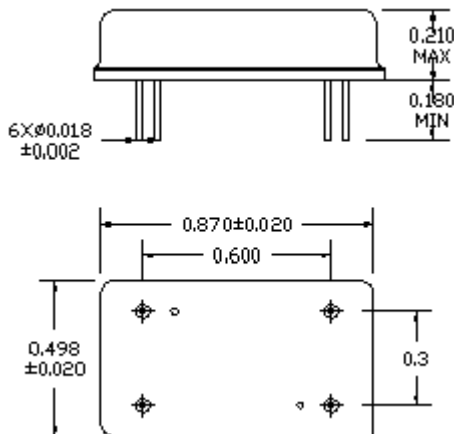

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XI