



140MHz Standard Filter

Part Number 140136

Typical Performance

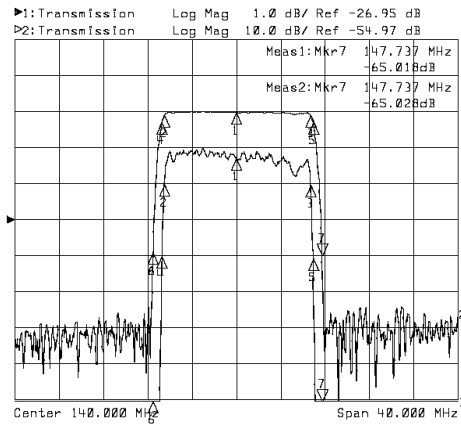

Horizontal: 4.0MHz/Div
Vertical: 1dB/Div&10dB/Div


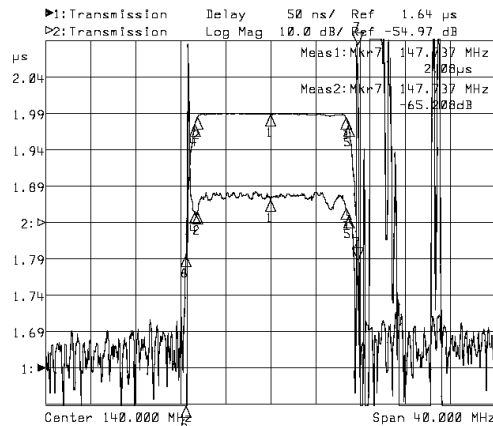


Horizontal: 4.0MHz/Div
Vertical: 50nsec/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	139.85	140.00	140.15
Insertion Loss at F0	dB		24.00	26.00
1 dB Bandwidth	MHz	13.00	13.05	
3 dB Bandwidth	MHz	13.50	13.60	
40dB Bandwidth	MHz		15.25	15.30
Passband Variation	dB		0.80	1.00
Group Delay Variation	nsec		30	50
Absolute Delay	usec		1.87	1.89
Ultimate Rejection	dB	50	55	
Substrate Material	-		YZ-LiNbO3	
Ambient Temperature	°C	-40	25	80

Package

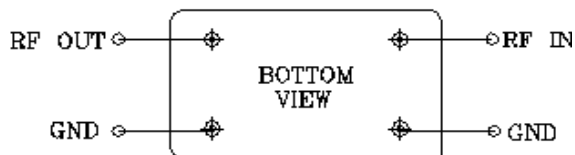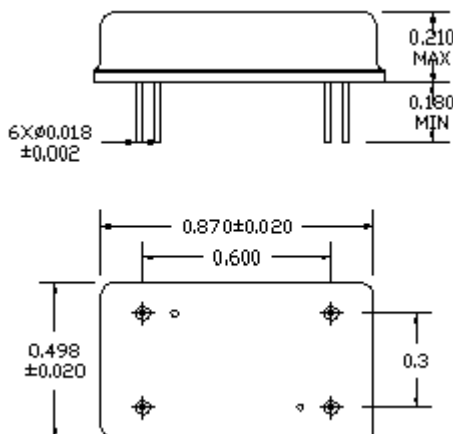

No Matching Required
Source/Load Impedance=50ohm
Package Style XI