



36MHz CATV Filter (PAL B/G)

Part Number LBN38.9-6XP

Typical Performance

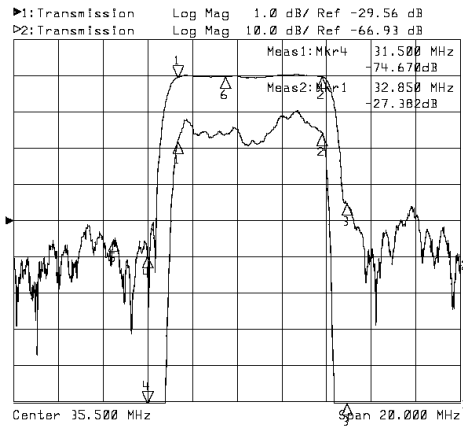

Horizontal: 2.0MHz/Div
Vertical: 1dB/Div&10dB/Div


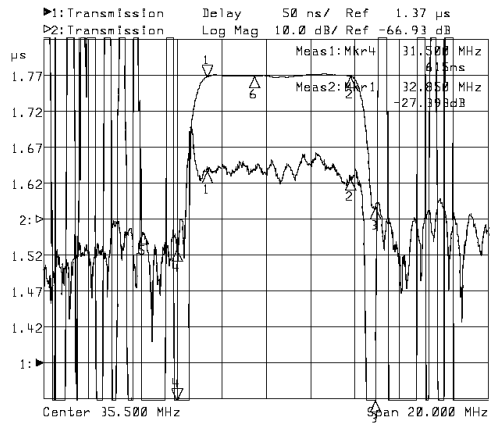


Horizontal: 2.0MHz/Div
Vertical: 50nsec/Div&10dB/Div

Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	36.00	36.10	36.20
Insertion Loss at F0	dB		27.50	28.00
@32.850MHz	dB	-0.80	-1.00	
@39.35MHz	dB	-0.80	-1.00	
@40.40MHz	dB	-35.07	-38.00	
@32.00MHz	dB	-20.25	-35.00	
Passband Variation	dB		1.00	1.15
Group Delay Variation	nsec		50	60
Absolute Delay	usec		1.60	1.62
Ultimate Rejection	dB	35	38	
Substrate Material	-		128LiNbO3	
Ambient Temperature	°C	-40	25	80

Package

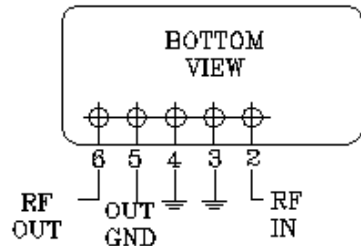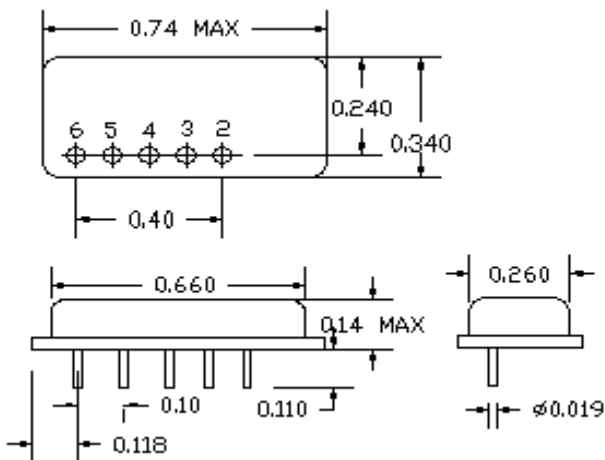

No Matching Required
 Source/Load Impedance=50ohm
 Package Style XP